


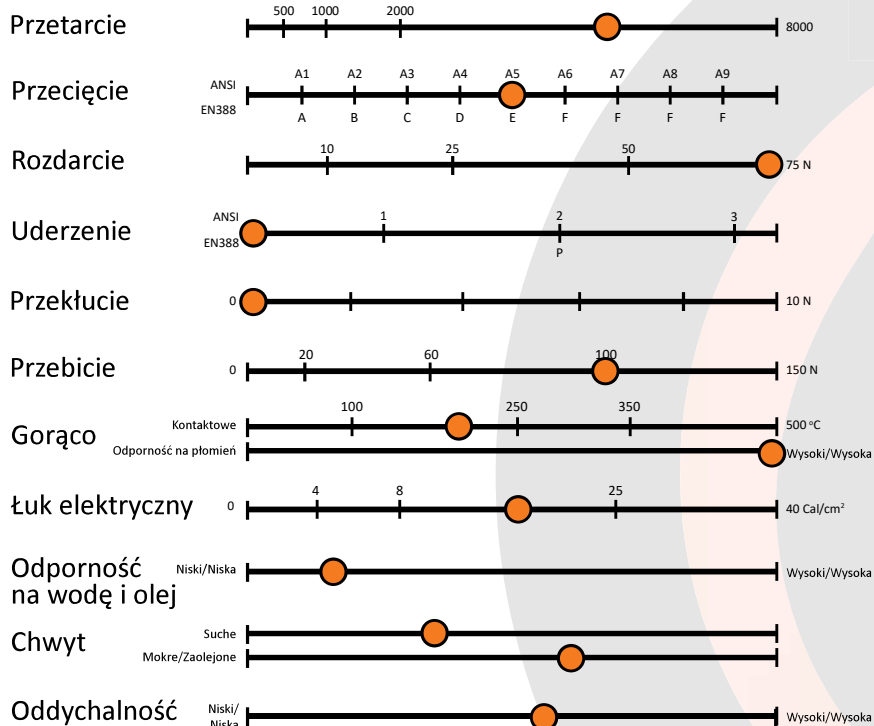

WŁAŚCIWOŚCI TECHNICZNE


EN388

3X42E
EN407

41312X
ARC FLASH
ASTM F2675, ATPV=

17,1 Cal/cm² (Góra dłoni)

57,9 Cal/cm² (dłoni)

NFPA 70E=

Level 2

 ISO (A-F)
 A | > 2 N
 B | ≥ 5 N
 C | ≥ 10 N
 D | ≥ 15 N
 E | > 22 N
 F | > 30 N

EN1149-1

1,18.10⁹ Ω

 ART.NR: 13-4HAF-17
 60 par (5 tuzinów) / karton

CE
CAT III
1493

7	8	9	10	11	12
XS	S	M	L	XL	XXL